


Wrapper machine designed to produce, with the proper functional groups, a large variety of wrapping styles: Double Twist, Twist on top, Bunch, Wallet, Envelope, Napolitain, Fancy.



The feeding of products is made by an aligner that put product on a line and a phase belt that get a distance from one product to the others, in this way the product will never touch each other, than a pusher put the product on the feeding chain.

Machine is delivered complete of safety guards as per CE norms and first aid spare parts.

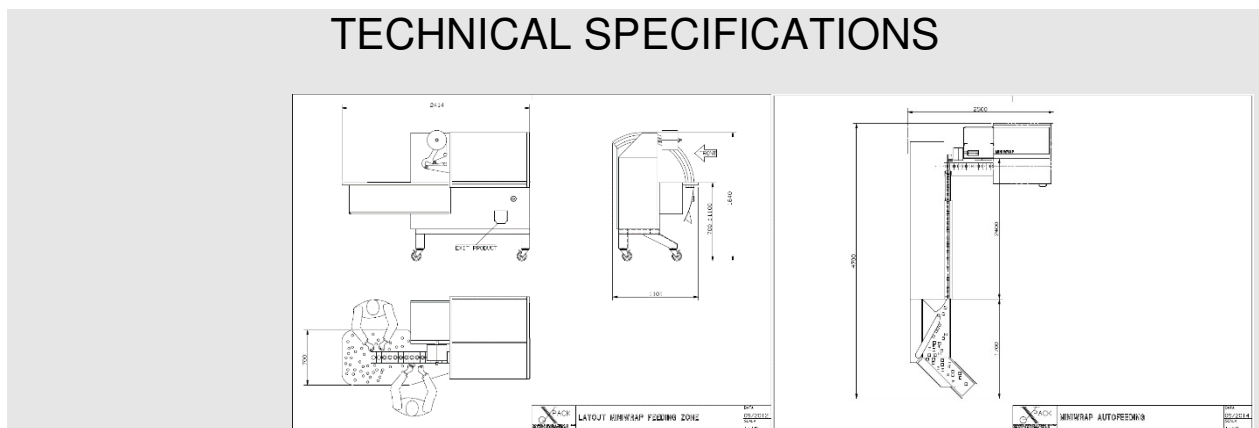

Standard Products Size Range: Width: min 18 mm max 45 mm
 Length: min 18 mm max 90 mm
 Thickness: min 10 mm max 32 mm

Measures out of range could be possible upon technical evaluation.

Specification regarding Miniwrap with manual infeed:

Maximum Speed Up to 180/minute
 Hand Feed : depends by the skill of operator 110 to 130/minute
 Change over time: less than 20 minutes (within the same wrapping style)
 Reel Dimensions: Max 300 mm with core diameter from 30 to 80mm
 Lubrication: Oil lubrication
 Total Weight: 750 Kg
 Installed power: 0,85 Kw, 220 V, single phase

Specification regarding Miniwrap with automatic infeed:

Capacity speed: Up to 200/minute
 Change over time: less than 20 minutes
 Reel Dimensions: Max 300 mm with core diameter from 30 to 80mm
 Lubrication: Oil lubrication
 Total Weight: 1100 Kg
 Installed power: 1,2 Kw, 220 V, single phase